

# *Multi II 433*



**Quick user guide**


09/2024

## Introduction

The Multi II models allow the copying or programming of most of the fixed and rolling code controls in our catalogue.

This remote control has been designed to be able to copy different types of codes (fixed and rolling codes) whose frequencies are in the 433 MHz band on the same remote control. Thanks to its periodic updates, new compatibilities are introduced remotely in these devices, which avoids returns, and reduces *stock*.

This device is compatible with the Kaptia Klever system.

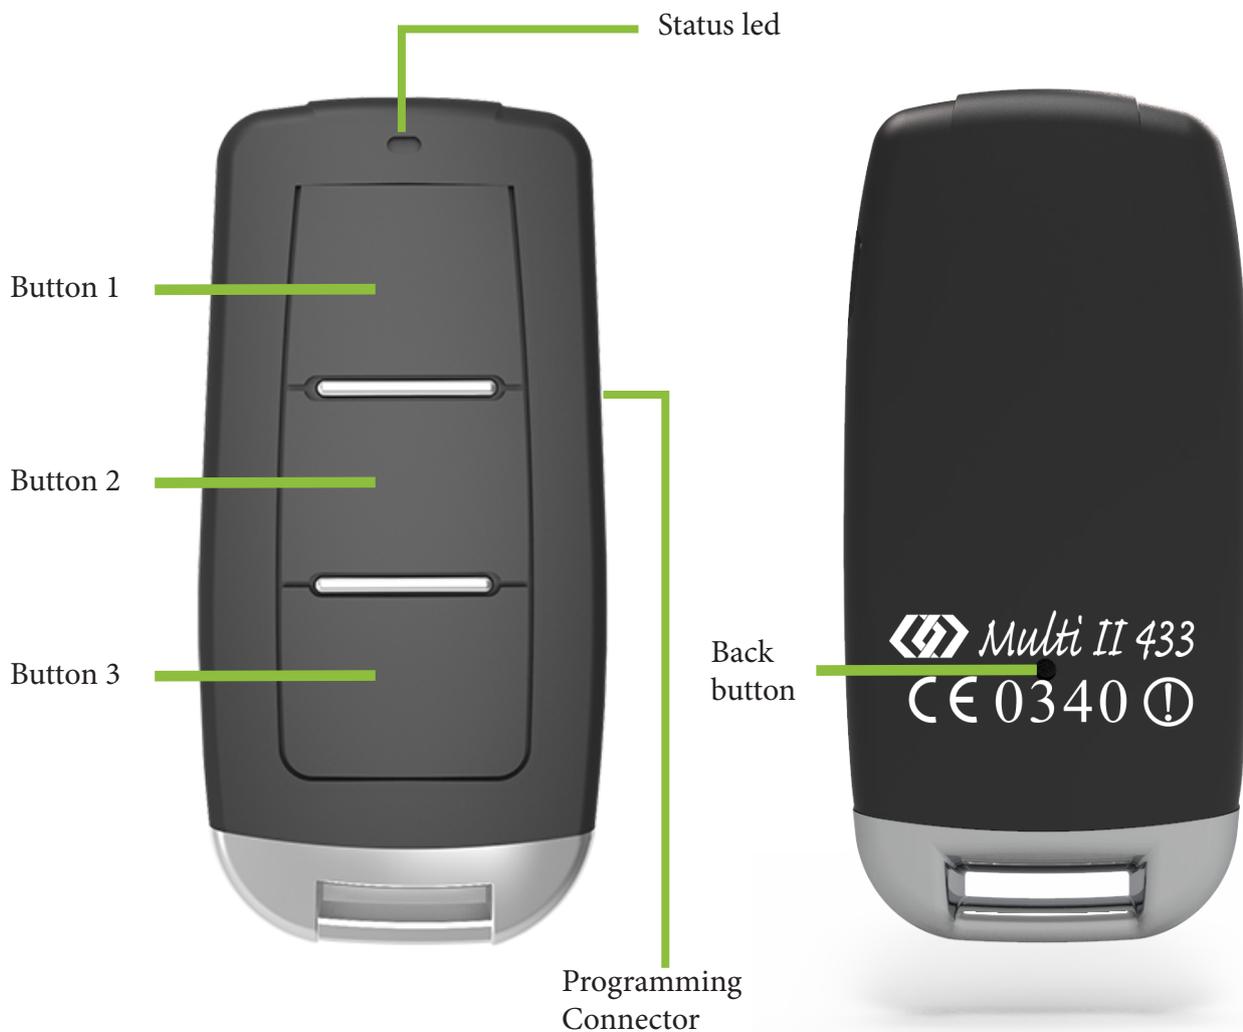


## Operation

To program the remote control, it must be connected to the micro USB cable of the Kaptia Klever duplicator. The app will guide you through all the necessary steps until programming is complete.

## Advanced Features

This remote allows button combinations, which can be programmed to increase the number of codes on the same remote. To transmit these codes, the indicated buttons must be pressed at the same time (see image).

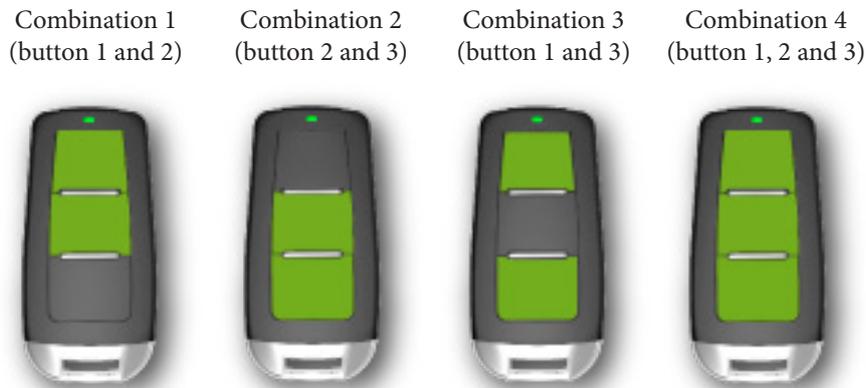

## Back button

This button will be used for opening via radio in those remote control models that allow it. To do this, press the rear button and then press the front button (or combination) corresponding to the desired control while the LED (green) is flashing.

## Indicator light

The device LED reports the following situations:

The LED flashes green regularly while the button is pressed	The code is transmitted normally
The LED flashes red once when you press a button	The pressed button is not programmed
The LED flashes red 3 times when a transmission ends	The battery is low. The battery must be replaced.
The green LED flashes every second after pressing the rear button	It waits for the user to press one of the buttons/combination to access the programming opening mode

## Battery replacement

This remote control works with 1 NON-RECHARGEABLE battery type CR2032.

To replace them, you must lever the notch on the right side with a coin or similar object until it opens.

Once opened, the used batteries must be removed from the battery holder and replaced with new ones of the same type, respecting the polarity.

Side notch



### Technical characteristics

Compatible codes	Fixed and rolling codes (see compatibility list)
Operating frequency	433MHz band
Number of buttons	3
Maximum number of codes	7 (allows combinations)
Range	< 100 meters
Status LED color	Green / Red
Battery	1 x 3V (type CR2032)
Compatible system	Kaptia Klever / Key
Updatable	Yes

**Important: The programming connector should only be used to program the device. Using this connector for any other purpose may damage the device.**